

DOTLINE360™

TB-1230 QW



FEATURES

- Offers excellent color mixing and smooth output across the two independent zoom zones
- 12 leds can be controlled individually
- Contains 4 fans to improve the cooling effect
- Linear motorized zoom
- Smooth dimming from 0-100%



TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 12 x 30 W RGBW LED
- Angle:
 - Beam Angle: 3.5°-38°
 - Field Angel: 7°-50°

Control

- DMX Channel: 57/14 Channels
- Protocols: DMX512, RDM, Art-Net
- Firmware Upgrade via DMX link

Pan/Tilt

- Tilt: 220°


Construction

- Display: OLED display
- Battery backup for user setup without power connection
- Data In/Out: 3-pin or 5-pin XLR, RJ45
- Power In/Out: Power Connector in/out
- Protection Rating: IP20

Electrical and Physical

- Input Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 440 W
- Dimensions: 1,000 x 113 x 278mm (39.3" x 4.4" x 10.9")
- F/C Dimensions: 1,265 x 600 x 500 mm (49.8" x 23.6" x 19.7")
- Weight: 18.5 kg (40.8 lbs)
113 kg (249.1 lbs)(Quad Loader Case)


PHOTOMETRICS DIAGRAM

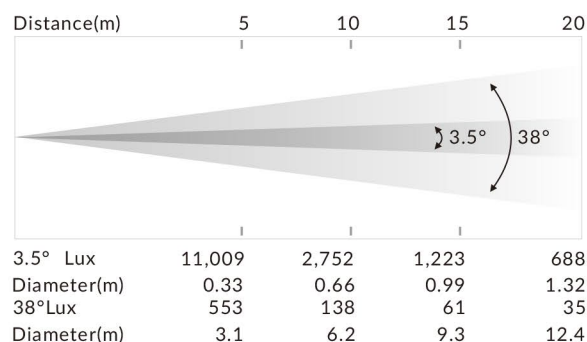




LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

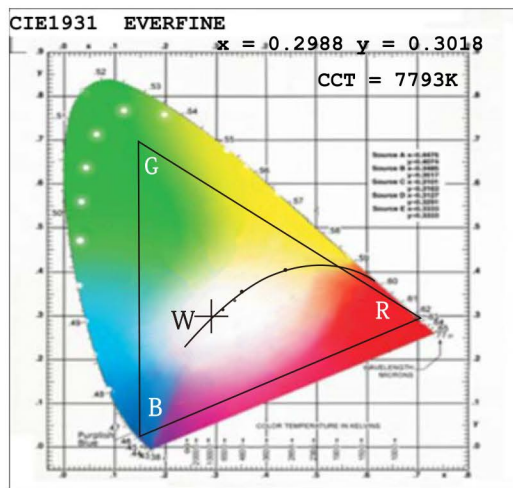

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

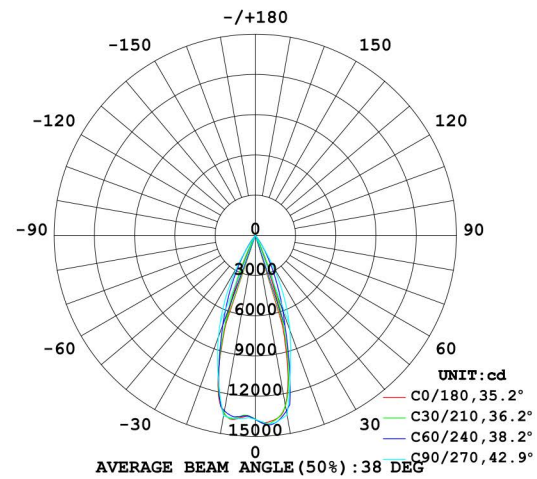

DIMENSIONS mm (in.)

