

SANDANE™

PAR 54 IP

FEATURES

- Compact size, light weight, high efficiency, low energy consumption
- Variable CTO: 2,500K-8,000k
- Protection Rating: IP66
- 0-100% smooth dimming
- Double hanger design and multiple installation methods are available
- Outstanding strobe effect with variable speed
- 1 x foldable clamp for 50 millimeter truss
- Optional Half or Full size Anti-glare shield



TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 54 x 6W RGBW LED
- Lens Option: 19°, 23°, 30°, 40°, 58°
- Field Angle: 37°, 45°, 59°, 74°, 100°
- Total lumen output up to 10,000lm (45°)


Control

- DMX Channel: 10/8/6/5/4
- Protocols: DMX512, RDM, Primary/Secondary
- Firmware Upgrade via DMX link

Construction

- Display: OLED display
- Data In/Out: 3-pin or 5-pin IP XLR
- Power In/Out: Waterproof Power Connector in/out
- Hanger: Double hanger (with fixed clamps)
- Protection Rating: IP66

PHOTOMETRICS DIAGRAM

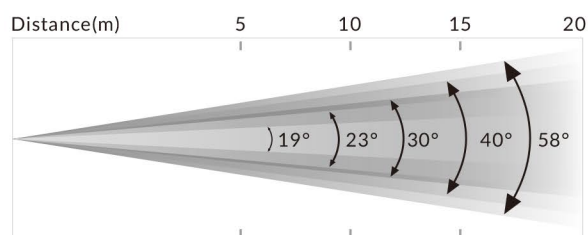

	5	10	15	20
19° Lux	2,950	738	328	184
Diameter(m)	1.67	3.3	5	6.7
23° Lux	2,780	695	309	174
Diameter(m)	2.1	4.1	6.2	8.2
30° Lux	1,805	451	201	113
Diameter(m)	2.7	5.4	8.1	10.8
40° Lux	1,250	313	139	78
Diameter(m)	3.6	7.2	10.8	14.4
58° Lux	850	213	94	53
Diameter(m)	5.6	11.2	16.7	22.3



Electrical and Physical

- Power Voltage Range: 100-240V~ 50Hz
- Power Consumption: 230 W
- Dimensions: 272 x 300 x 128mm(10.7" x 11.8" x 5")
- F/C Dimensions: 1,135 x 615 x 550mm (44.7" x 24.2" x 21.7")
- Weight: 5.7 kg (12 lbs)
- 113.9kg(251.1lbs)(Twelve-pack Loader Case)



OPTIONAL SHIELD

1



2




CONNECTION




LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

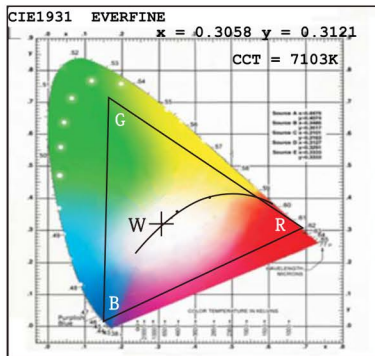

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

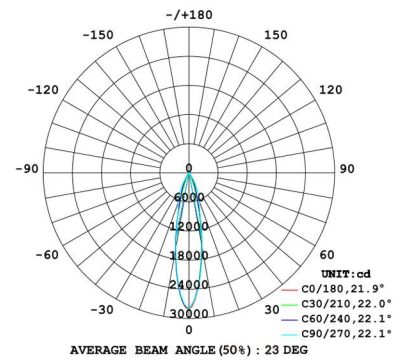

DIMENSIONS mm (in.)

