

STAGE BLINDER IP™

BL-200 CW/WW2/VW/RGBW

FEATURES

- Adjustable color temperature (VW)
- Unique tungsten effect (WW2)
- Unique hsic mode (RGBW)
- Smooth dimming from 0-100%
- Super bright and outstanding strobe effect with variable speed
- Equipped with a special patented plug structure, can be easily combined with each other or with other BL200 series



TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 2 x 110W cool white LED (BL-200 CW)
2 x 125W LED module (BL-200 VW/WW2)
2 x 150W LED module (BL-200 RGBW)
- Color Temperature: 2700K (BL-200 WW2)/1200K (Tungsten Mode)
5000±300K (BL-200 CW)
2700~6500K (BL-200 VW)
- Beam Angle: 50° (BL-200 CW)
50°(BL-200 VW/WW2)
37°(BL-200 RGBW)
- Field Angle: 90° (BL-200 VW/WW2)

Control

- DMX channel: 1/2/4/6 channels (BL-200 CW/WW2)
3/4/4Chr/5/6 channels (BL-200 VW)
6/7/10/4(HSIC) channels (BL-200 RGBW)
- Protocols: DMX512, RDM
- Firmware Upgrade via DMX link


Construction

- Display: LED display
- Data In/Out: 3-pin or 5-pin IP XLR
- Power In/Out: Waterproof Power Connector in/out
- Protection Rating: IPX4

Electrical and Physical

- Input Voltage Range: AC 100-240V, 50/60Hz
- Power Consumption: 235 W
- Dimensions: 400 x 215 x 200mm (15.7" x 8.4" x 7.8")
- F/C Dimensions: 1,245 x 570 x 648 mm (49" x 22.4" x 25.5")
- Weight: 6.8 kg (14.9 lbs)
96.4 kg (212.5 lbs)(Eight-pack Loader Case)

PHOTOMETRICS DIAGRAM

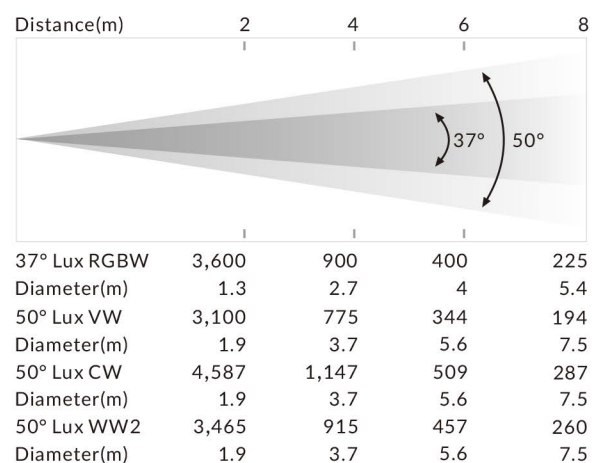



JOINT SCHEMATICS




TWO ADJUSTABLE ANGLES FOR LED MODULE:


- ① 0, 7.5, 15
- ② 0, -7.5, -15

LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(BIG ANGLE)

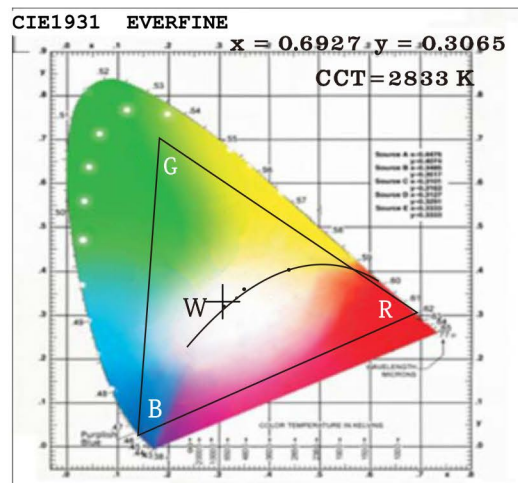

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

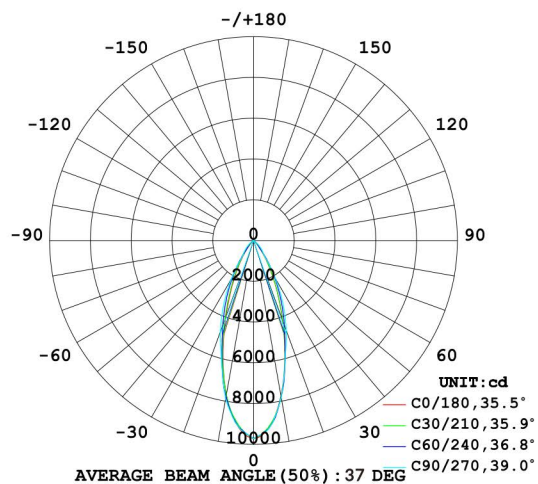

DIMENSIONS mm (in.)

