

THUNDER BREAKER™

BL-200 VS

FEATURES

- 144 zones can be controlled individually
- Outstanding strobe effect with variable speed
- Compact size, light weight
- Smooth dimming from 0-100%
- Protection rating: IPX4

TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 576 x 0.8 W RGBW LED
- Beam Angle: 110°
- Spot Angle: 150°

Control

- DMX Channel: 6+/11+/12+/13A+/13B+/17+/21A+/21B+/29+/37+/41+/53+Pixel
- Control mode: DMX512,RDM ,sACN,Art-Net
- Firmware Upgrade via DMX link or USB disk

Construction


- Display: LED display
- Date In/Out: 3-pin or 5-pin IP XLR
- Power In /Out: Waterproof Power Connector in/out
- Protection Rating: IPX4


Electrical and Physical

- Input voltage range: 100-240V~ 50/60Hz
- Power Consumption: 395 W
- Dimensions: 503 x 183 x 318 mm (19.8"x7.2"x12.5")
- Flight Case Dimensions: 1075 x 565 x 535mm (42.3" x 22.2" x 21.1")
- Weight: 10.5 kg (23.1 lbs)
- 81 kg (178.6 lbs)(Quad Loader Case)




PHOTOMETRICS DIAGRAM

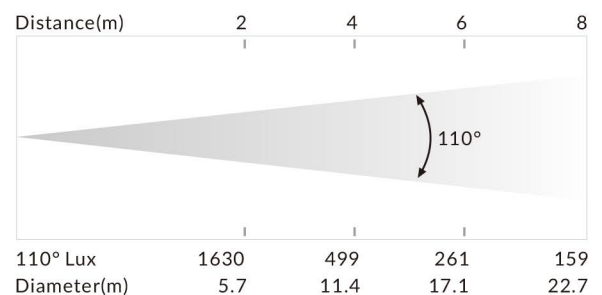

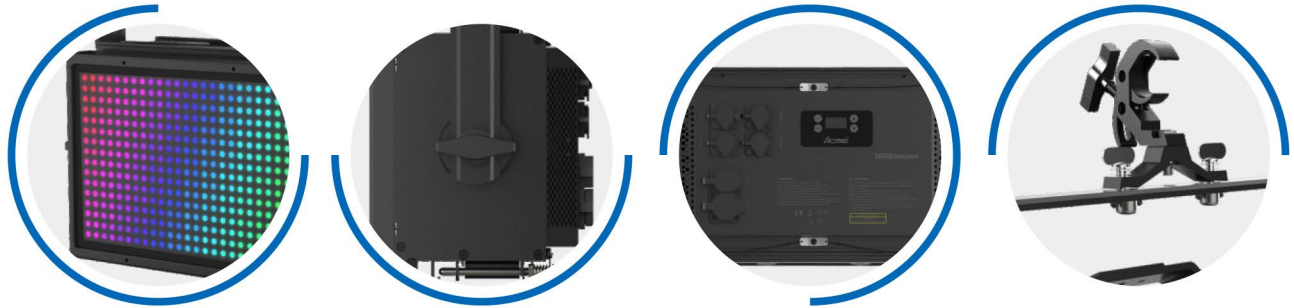


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

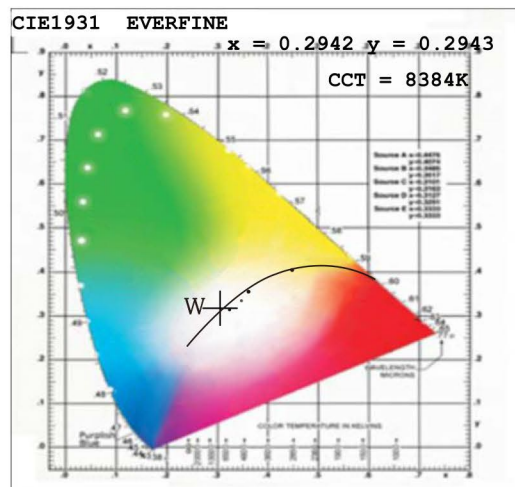

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

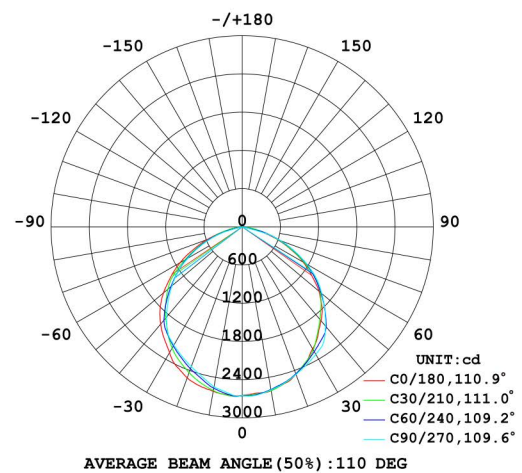

DIMENSIONS mm (in.)

