



**ZEISS SUPREME PRIME &  
SUPREME PRIME RADIANCE LENSES**



# ZEISS Supreme Prime & Supreme Prime Radiance Lenses

## Overview



ZEISS Supreme Prime  
14 lenses



ZEISS Supreme Prime Radiance  
11 lenses






## **Cinematic large-format coverage and high speed**



The ZEISS Supreme Prime lenses are designed for cinematic large-format sensor coverage, making them the ideal choice for current and future camera systems. With most lenses at T1.5, the ZEISS Supreme Primes demonstrate their unsurpassed craftsmanship in tricky low-light environments. They give the creator absolute control by revealing subtly nuanced details in deep shadows and bright highlights.



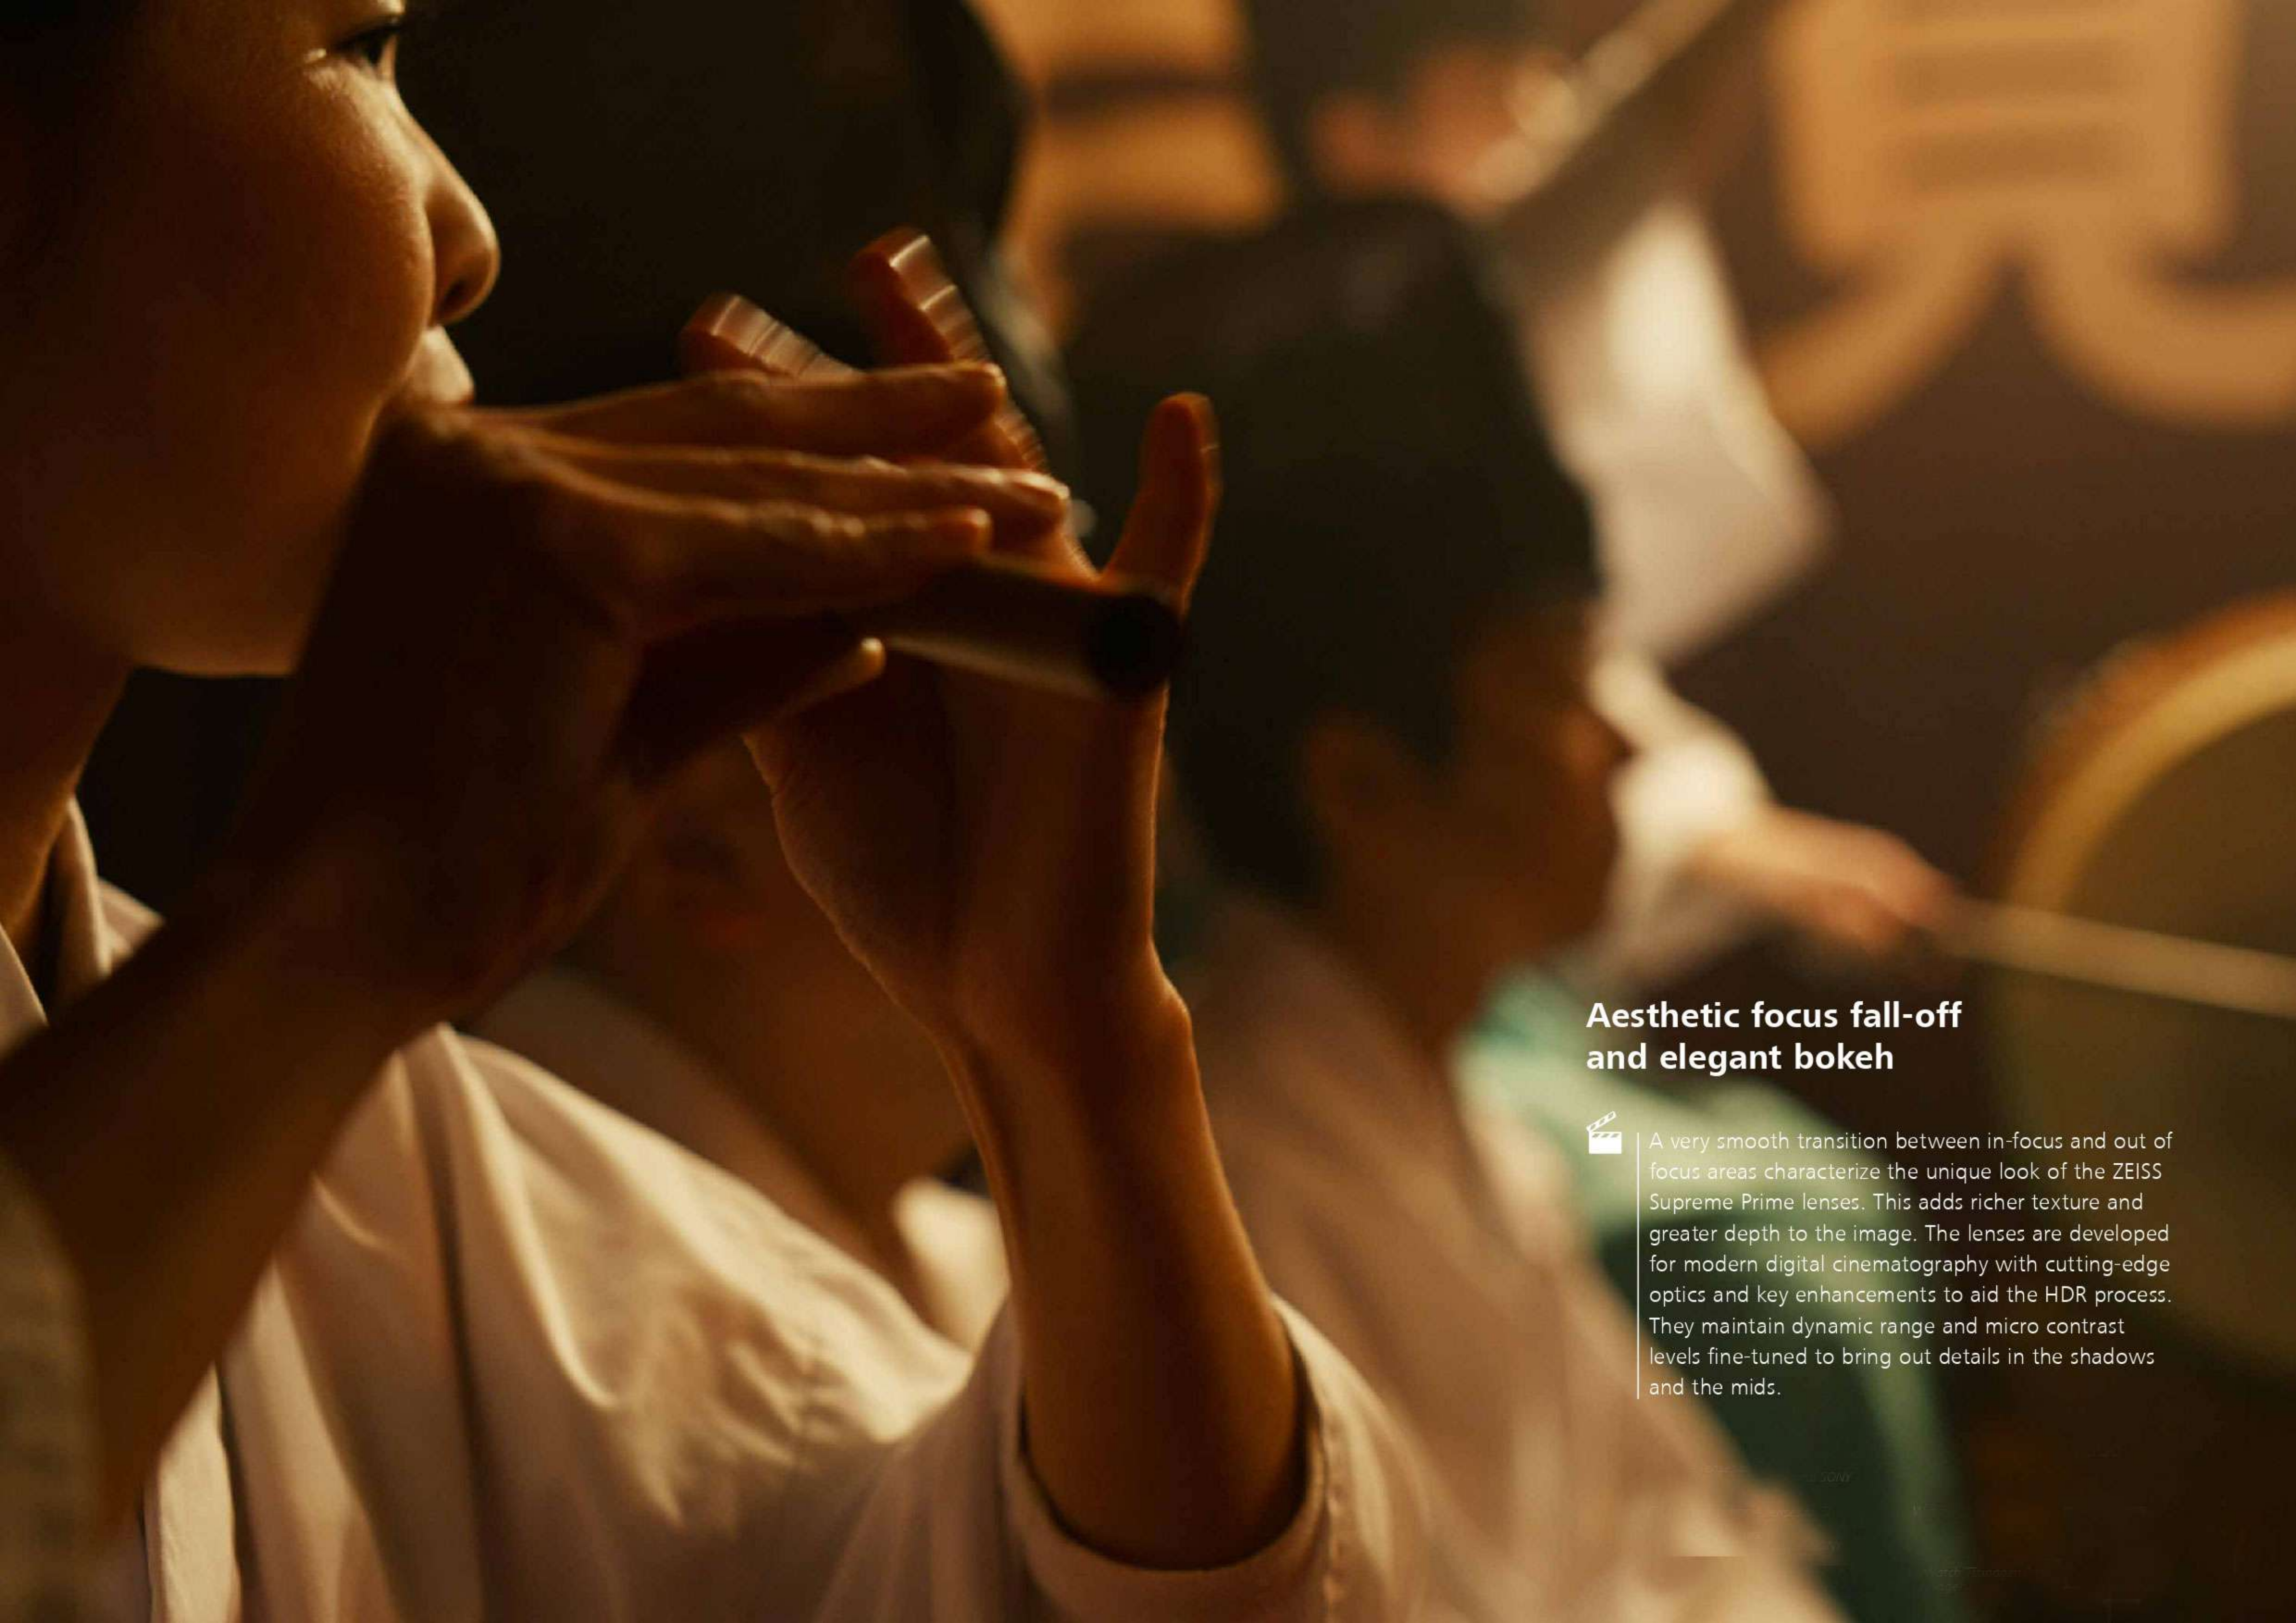

## Aesthetic focus fall-off and elegant bokeh



A very smooth transition between in-focus and out of focus areas characterize the unique look of the ZEISS Supreme Prime lenses. This adds richer texture and greater depth to the image. The lenses are developed for modern digital cinematography with cutting-edge optics and key enhancements to aid the HDR process. They maintain dynamic range and micro contrast levels fine-tuned to bring out details in the shadows and the mids.

ZEISS Supreme Prime

ZEISS Supreme Prime

ZEISS Supreme Prime

Watch the demo



# Taking consistency to the next level

## ZEISS Supreme Prime lenses



Consistency is one of the key elements offered by the ZEISS Supreme Prime lenses: that means consistent coverage, color rendering, aperture, size, weight and ergonomics. All the lenses across the family cover full frame and even bigger sensors with an image circle of 46.3 mm. The Supreme Prime lenses are color matched across the full range and most feature a fast T-stop of T1.5. The small front diameter of 95 mm on almost all lenses and standardized

positioning of the focus and iris rings across the whole family facilitate fast and easy equipment changeout. The compact and lightweight design means you enjoy easy and comfortable handling. The ultra-smooth focus rotation of the Supreme Prime lenses even in extreme temperatures allows for small motors to make sure you have an easy setup that's enjoyable to work with.

### Technical Data

Supreme Prime	Release	Aperture	Close Focus <sup>1</sup>	Length <sup>2</sup>	Front diameter	Weight	Horizontal Angle of View	
							Full-Frame <sup>3</sup>	Super 35 <sup>4</sup>
15 mm T1.8	2021	T1.8 to T22	0.35 m / 14"	149 mm / 5.9"	114 mm / 4.5"	tbd	tbd	tbd
18 mm T1.5	Shipping	T1.5 to T22	0.35 m / 14"	163 mm / 6.4"	114 mm / 4.5"	2.27 kg / 5.00 lbs	88.4°	67.9°
21 mm T1.5	Shipping	T1.5 to T22	0.35 m / 14"	119 mm / 4.7"	95 mm / 3.7"	1.61 kg / 3.55 lbs	79.5°	59.8°
25 mm T1.5	Shipping	T1.5 to T22	0.26 m / 10"	119 mm / 4.7"	95 mm / 3.7"	1.42 kg / 3.13 lbs	70.8°	52.3°
29 mm T1.5	Shipping	T1.5 to T22	0.33 m / 13"	121 mm / 4.8"	95 mm / 3.7"	1.61 kg / 3.55 lbs	64°	46.8°
35 mm T1.5	Shipping	T1.5 to T22	0.32 m / 13"	119 mm / 4.7"	95 mm / 3.7"	1.40 kg / 3.09 lbs	55°	39.6°
40 mm T1.5	Shipping	T1.5 to T22	0.42 m / 17"	119 mm / 4.7"	95 mm / 3.7"	1.49 kg / 3.28 lbs	47.4°	33.8°
50 mm T1.5	Shipping	T1.5 to T22	0.45 m / 18"	119 mm / 4.7"	95 mm / 3.7"	1.22 kg / 2.69 lbs	39°	27.5°
65 mm T1.5	Shipping	T1.5 to T22	0.6 m / 2'	121 mm / 4.8"	95 mm / 3.7"	1.63 kg / 3.59 lbs	30.5°	21.3°
85 mm T1.5	Shipping	T1.5 to T22	0.84 m / 2'9"	119 mm / 4.7"	95 mm / 3.7"	1.42 kg / 3.13 lbs	24°	16.7°
100 mm T1.5	Shipping	T1.5 to T22	1.1 m / 3'9"	119 mm / 4.7"	95 mm / 3.7"	1.70 kg / 3.74 lbs	20.4°	14.2°
135 mm T1.5	Shipping	T1.5 to T22	1.4 m / 4'6"	146 mm / 5.7"	114 mm / 4.5"	2.27 kg / 5.00 lbs	15.6°	10.9°
150 mm T1.8	Shipping	T1.8 to T22	1.5 m / 5'	146 mm / 5.7"	114 mm / 4.5"	2.27 kg / 5.00 lbs	13.7°	9.5°
200 mm T2.2	Shipping	T2.2 to T22	2 m / 6'6"	183 mm / 7.2"	114 mm / 4.5"	2.87 kg / 6.33 lbs	10.3°	7.1°



<sup>1</sup> Minimum marked distance, measured from the image plane  
<sup>2</sup> Front to PL mount flange  
<sup>3</sup> Horizontal angle of view for a full-frame camera (aspect ratio 1:1.5, dimensions 36 mm x 24 mm / 1.42" x 0.94")  
<sup>4</sup> Horizontal angle of view for an ANSI Super 35 Silent camera (aspect ratio 1:1.33, dimensions 24.9 mm x 18.7 mm / 0.98" x 0.74")



# Complementing the Supreme lens system

## ZEISS Supreme Prime Radiance lenses



ZEISS Supreme Prime Radiance lenses are available in eleven focal lengths: 18 mm, 21 mm, 25 mm, 29 mm, 35 mm, 40 mm, 50 mm, 65 mm, 85 mm, 100 mm and 135 mm – all T1.5. Although being slightly warmer than regular Supreme Primes, they pair very well with them.

In addition to their controlled flare behavior and warmer touch, they retain all the well-known Supreme Prime features: an image circle of 46.3 mm to cover full frame sensors and beyond and a small front diameter of 95 mm with standardized positioning of the focus and iris rings on all lenses. Despite this, they are compact and lightweight and focus smoothly making it easy for you.



### Technical Data

Supreme Prime Radiance	Aperture	Close Focus <sup>1</sup>	Length <sup>2</sup>	Front diameter	Weight	Horizontal Angle of View	
						Full-Frame <sup>3</sup>	Super 35 <sup>4</sup>
18 mm T1.5	T1.5 to T22	0.35 m / 14"	163 mm / 6.4"	114 mm / 4.5"	2.27 kg / 5.00 lbs	88.4°	67.9°
21 mm T1.5	T1.5 to T22	0.35 m / 14"	119 mm / 4.7"	95 mm / 3.7"	1.61 kg / 3.55 lbs	79.5°	59.8°
25 mm T1.5	T1.5 to T22	0.26 m / 10"	119 mm / 4.7"	95 mm / 3.7"	1.42 kg / 3.13 lbs	70.8°	52.3°
29 mm T1.5	T1.5 to T22	0.33 m / 13"	121 mm / 4.8"	95 mm / 3.7"	1.61 kg / 3.55 lbs	64°	46.8°
35 mm T1.5	T1.5 to T22	0.32 m / 13"	119 mm / 4.7"	95 mm / 3.7"	1.40 kg / 3.09 lbs	55°	39.6°
40 mm T1.5	T1.5 to T22	0.42 m / 17"	119 mm / 4.7"	95 mm / 3.7"	1.49 kg / 3.28 lbs	47.4°	33.8°
50 mm T1.5	T1.5 to T22	0.45 m / 18"	119 mm / 4.7"	95 mm / 3.7"	1.22 kg / 2.69 lbs	39°	27.5°
65 mm T1.5	T1.5 to T22	0.6 m / 2'	121 mm / 4.8"	95 mm / 3.7"	1.63 kg / 3.59 lbs	30.5°	21.3°
85 mm T1.5	T1.5 to T22	0.84 m / 2'9"	119 mm / 4.7"	95 mm / 3.7"	1.42 kg / 3.13 lbs	24°	16.7°
100 mm T1.5	T1.5 to T22	1.1 m / 3'9"	119 mm / 4.7"	95 mm / 3.7"	1.70 kg / 3.74 lbs	20.4°	14.2°
135 mm T1.5	T1.5 to T22	1.4 m / 4'6"	146 mm / 5.7"	114 mm / 4.5"	2.27 kg / 5.00 lbs	15.6°	10.9°



<sup>1</sup> Minimum marked distance, measured from the image plane

<sup>2</sup> Front to PL mount flange

<sup>3</sup> Horizontal angle of view for a full-frame camera

(aspect ratio 1:1.5, dimensions 36 mm x 24 mm / 1.42" x 0.94")

<sup>4</sup> Horizontal angle of view for an ANSI Super 35 Silent camera (aspect ratio 1:1.33, dimensions 24.9 mm x 18.7 mm / 0.98" x 0.74")



# Focal length finder for large format shooters

## Quick comparison table: Super 35 – Large Format

When you're used to shooting Super 35, understanding large format sensors and lenses can be confusing. We've put together an easy to read table that gives you an overview of a few Super 35 lenses and equivalent focal

lengths that you could choose from, on selected large format cameras to get the field of view that you want to achieve – or get close to.

Equivalent focal length of ZEISS Supreme Prime (approx.)	Focal length used on Super 35	Equivalent focal length of ZEISS Supreme Prime (approx.)
15 mm	8 mm	–
18 mm	10 mm	15 mm
21 mm	12 mm	18 mm
25 mm	14 mm	21 mm
29 mm	16 mm	25 mm
29 mm	18 mm	29 mm
35 mm	20 mm	29 mm
40 mm	24 mm	35 mm
50 mm	28 mm	40 mm
50 mm	32 mm	50 mm
65 mm	40 mm	65 mm
85 mm	50 mm	85 mm
100 mm	65 mm	100 mm
150 mm	85 mm	135 mm
200 mm	100 mm	150 mm
–	135 mm	200 mm

### ZEISS SP, CZ.2 and CP.3 coverage

RED MONSTRO  
8K VV  
40.96 x 21.60  
Crop factor: 1.72

35FF+ (dgnl: 46.31)

### ZEISS LWZ.3 coverage

Super 35  
(ARRI ALEXA)  
23.76 x 17.82

(dgnl: 29.70)

### ZEISS SP, CZ.2 and CP.3 coverage

ARRI ALEXA (Mini) LF  
Open Gate Mode / 4.5K  
36.70 x 25.54  
Crop factor: 1.54

35FF+ (dgnl: 44.71)

SONY VENICE 6K  
36.20 x 24.10  
Crop factor: 1.50

35FF (dgnl: 43.50)

Reading example: to match the field of view of 40 mm on Super 35, you choose 65 mm on 35FF, e.g. SONY VENICE 6K (40 mm x crop factor 1.50 = 65 mm).

# Ultimate flexibility

## Interchangeable Mount System




The ZEISS Supreme Prime and Supreme Prime Radiance lenses are equipped with an easy-to operate, interchangeable mount system. It enables a quick change from PL-mount to LPL-mount. This proven feature offers

tremendous flexibility and is a future-proof investment in today's rapidly changing camera market. Both mounts have an electrical interface for transferring ZEISS eXtended Data to the camera.



User Interchangeable  
Lens Mounts

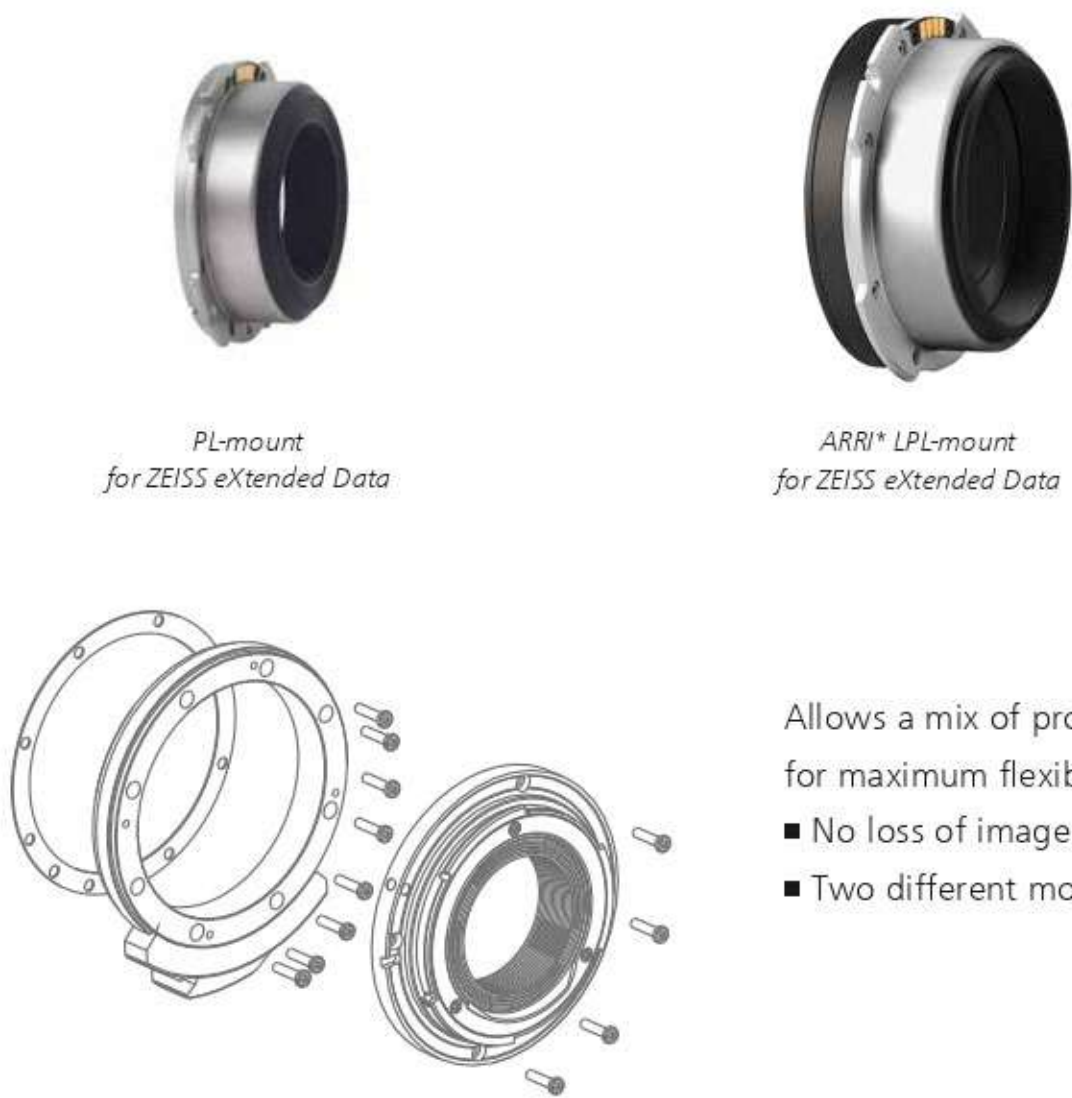

Allows a mix of professional cine cameras, for maximum flexibility on set

- No loss of image quality due to adapter solutions
- Two different mounts available (PL and LPL)



**Shot on ZEISS Supreme Prime**

Numerous feature films, TV dramas, TV shows, commercials, music videos and other projects are shot with ZEISS Supreme Prime lenses every day. And we want you to know what happens with Supreme Prime lenses around the world. That's why we've curated a playlist with trailers and full projects for you to find out more

about how Supreme Primes are used – be it in America, Europe, Asia or elsewhere. Of course, we will continually update this playlist. Feel free to watch and share: [zeiss.ly/shotonsp](https://zeiss.ly/shotonsp)

Find a detailed overview also on the Internet  
Movie Database (IMDb): [zeiss.ly/sp-imdb](http://zeiss.ly/sp-imdb)




## ZEISS Cinema Showroom

Experience everything ZEISS Cine in one place



ZEISS is focused on supporting the cinematography community. That's why we created a state-of-the-art Cinema Lens Demo Center in Sherman Oaks, California, complete with a showcase of cinema lenses, a camera prep area, a lens projection bay, lounge and a 4K HDR theater. We book appointments with cinematographers who wish to experience the finest that ZEISS has to offer.

We welcome cinematographers to come and check out the latest in lens and lens technology offered by ZEISS. No matter the size of the production, ZEISS has the right lens to bring your vision to life.

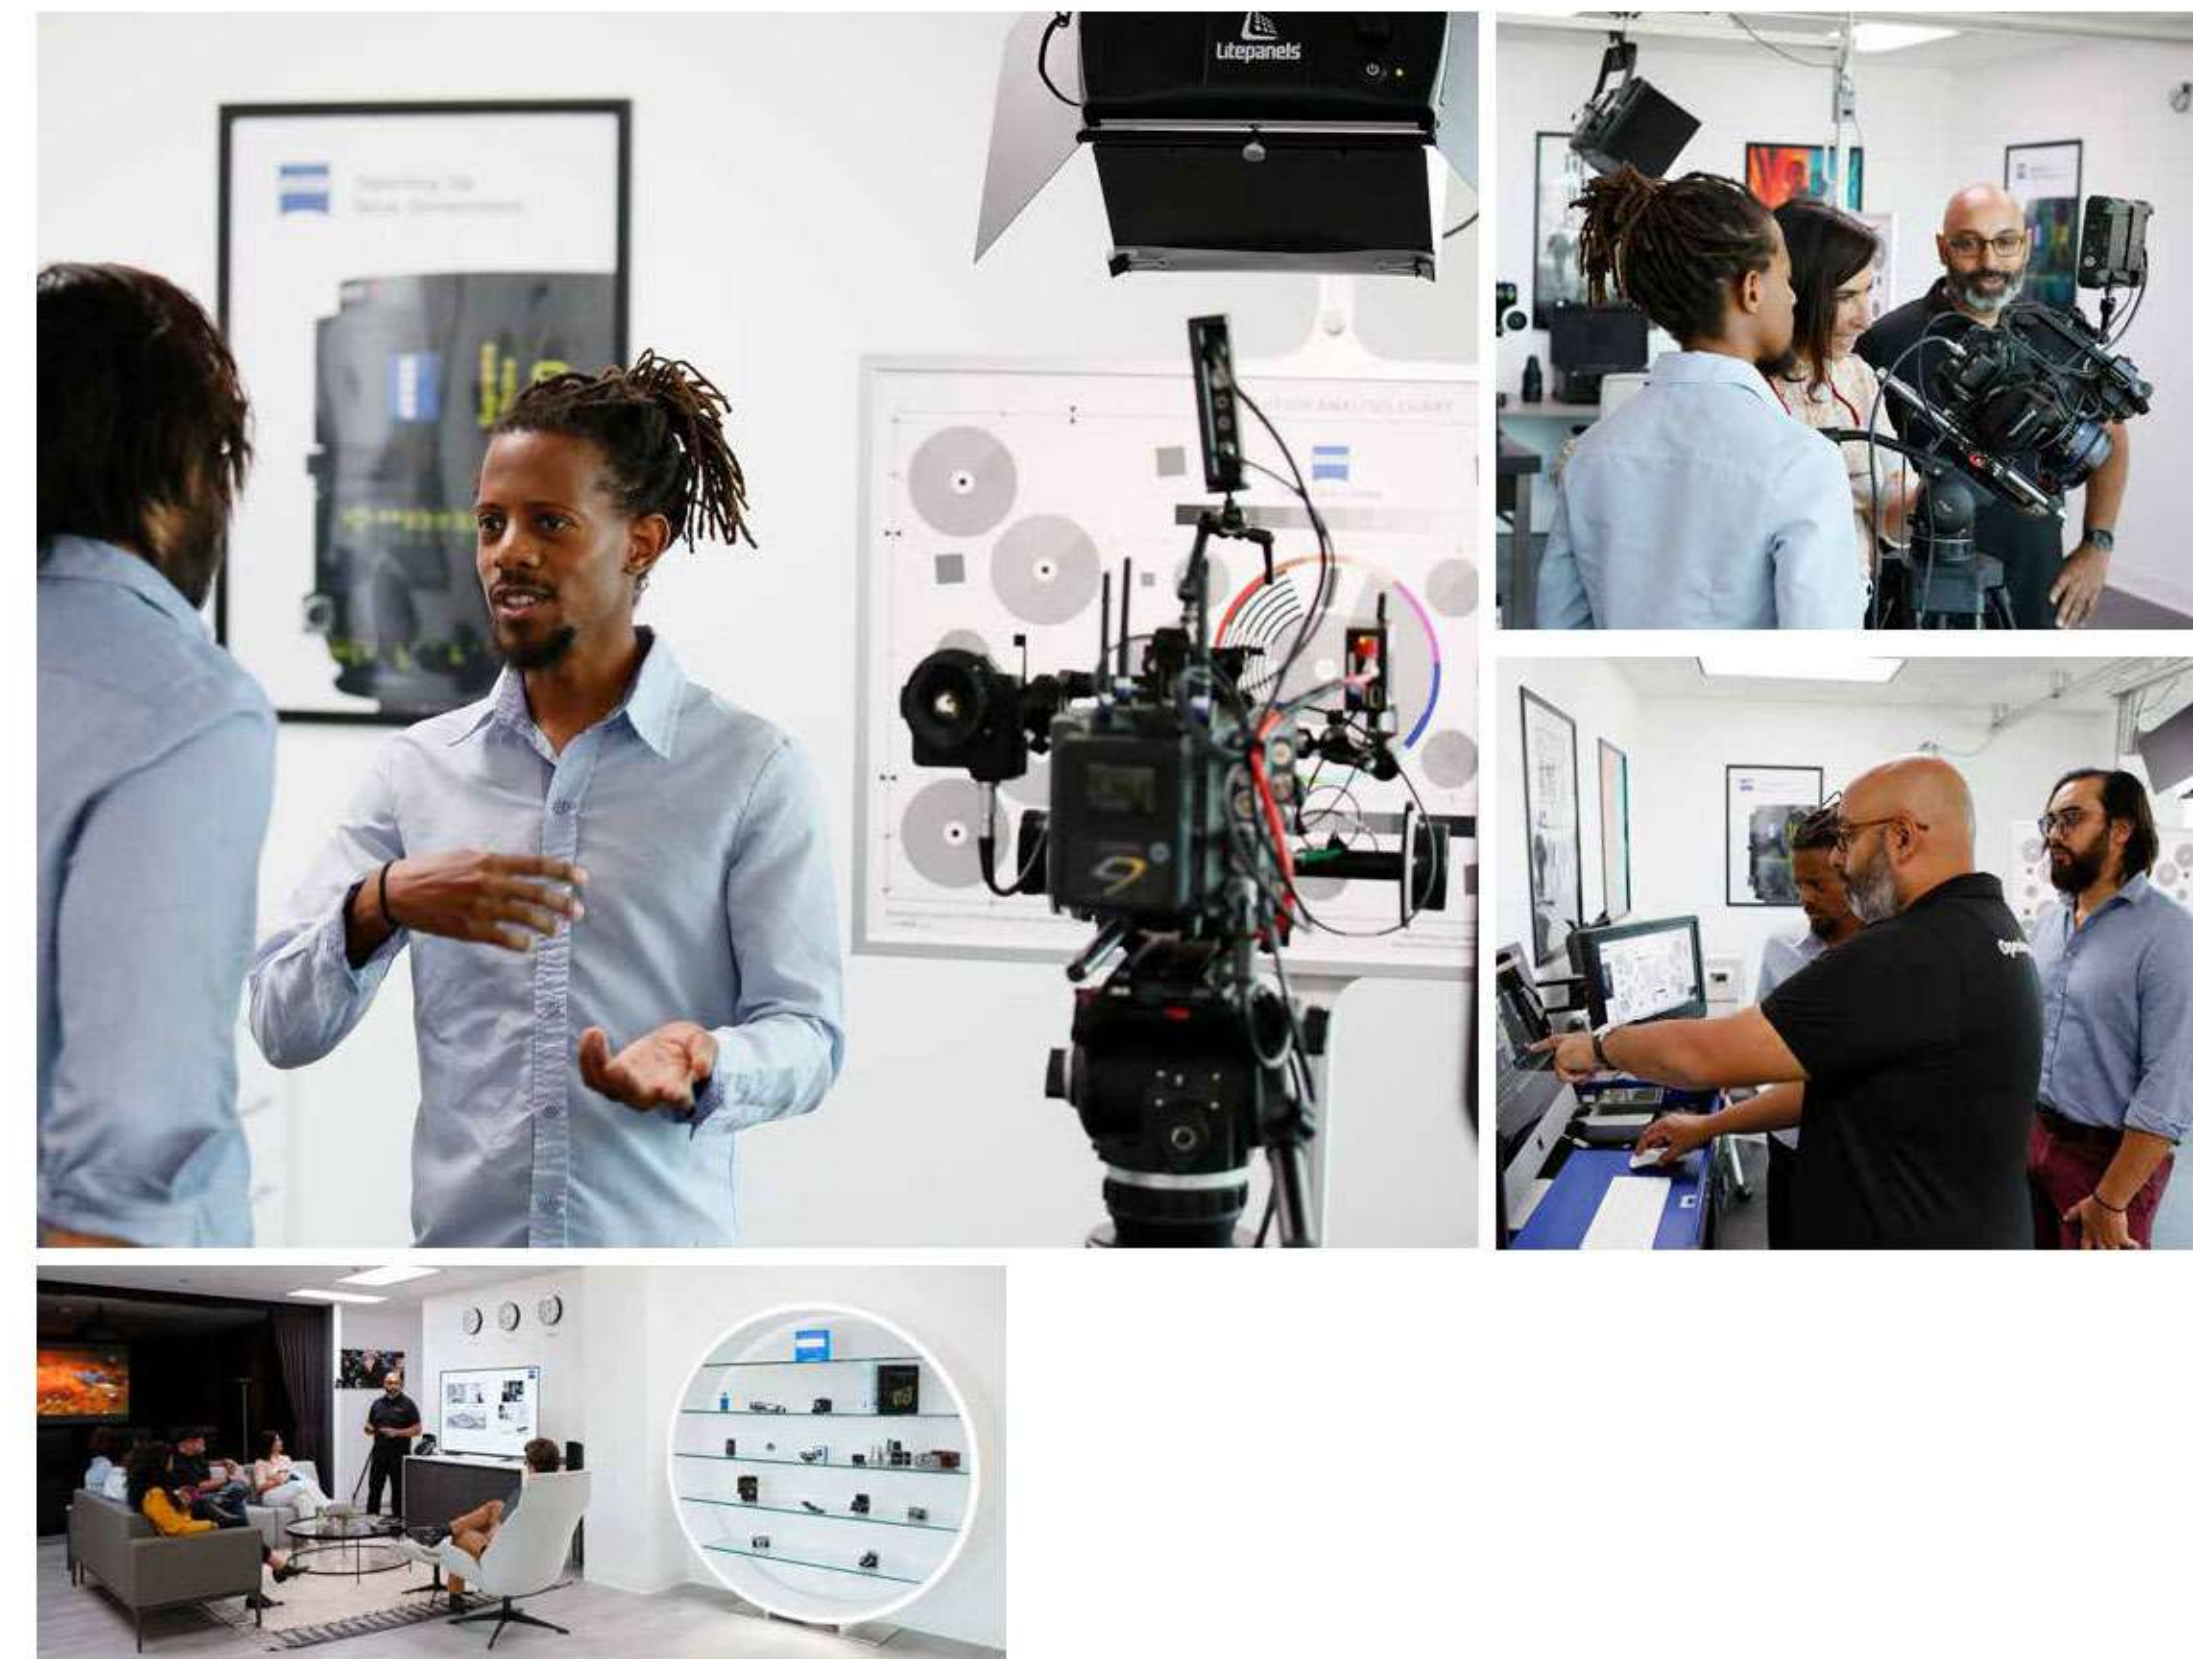



# Turning imagination into a motion picture

## ZEISS Cinematography lenses



While the cinematographer pays attention to every detail of the image to tell the story, ZEISS pays attention to every detail of manufacturing lenses so that they support the cinematographer in bringing these stories to life. With more than fifty years of experience in cinematography lenses the ZEISS brand is known for quality and reliability, and we put all our passion into crafting

optics that serve the artistic pursuits of cinematographers.

In its long history, ZEISS has created some of the most pioneering products the industry has ever seen: The early ZEISS Super Speeds that are still among the most-beloved cinematography lenses out there. The ARRI/ZEISS Ultra Primes, which have come to be known as work horses in the industry.

The ARRI/ZEISS Master Prime and ARRI/ZEISS Master Anamorphic lens series, which are the products of engineering excellence. And eXtended Data technology which bridges the gap between production and post-production – an absolute must in modern filmmaking.

With the invention of the first anastigmatic lens with distortion-free imaging (later: Protar®) by Paul Rudolph, ZEISS launches a new era of camera lens development.

ZEISS creates the world's fastest lens for NASA – the Planar 50 mm f/0.7. This lens was then used by Stanley Kubrick in 1975 to shoot a famous scene from Barry Lyndon that was only lit with candle light.

Oscar for Super Speed Lenses Category Science and Engineering

Oscar for Variable Prime Lenses Category Science and Engineering

ZEISS Compact Prime CP.2 – First cinematography lenses with interchangeable mount.

ZEISS Lightweight Zoom LWZ.3

